

Universal speaker wall mount that swivels and tilts.

QG-SB-002-BLK



Swivel $\pm 70^\circ$ left or right · tilt $\pm 20^\circ$ up or down

BLACK

MAXIMUM RATED LOAD PER MOUNT

7.7 lb / 3.5 kg

⚠ Caution. Do not exceed the maximum rated load.
Overloading can cause serious injury or property damage.

Before you begin

Note. Read this entire manual before you start installation and assembly.

⚠ Warning

- Do not begin to install your QualGear product until you have read and understood all instructions and warnings in this manual. U.S. customers with questions can email QualGear support at support@qualgear.com. International customers should contact their local distributor.
- This product should be installed only by someone with good mechanical aptitude and basic building construction experience who fully understands these instructions.
- This product is designed to be installed and used only as described in this manual. Improper installation can cause damage or serious injury. QualGear is not liable for improper use or installation of its products.
- Make sure the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- Always use an assistant or mechanical lifting equipment to lift and position the equipment safely.
- Tighten screws firmly, but do not overtighten. Overtightening can damage the parts and greatly reduce their holding power.
- All QualGear products are for indoor use only. Outdoor use voids the limited warranty.
- All QualGear products are designed and tested for residential use only. Commercial use voids the limited warranty. For warranty information, visit qualgear.com/pages/warranty.
- When mounting to wood studs, make sure the mounting screws are anchored into the center of the studs. An edge-to-edge stud finder is highly recommended.
- Never exceed the maximum rated load specified in this manual: 7.7 lb / 3.5 kg per mount.
- Use all bolts and screws at the designated points shown in these instructions to prevent property damage and personal injury.
- Do not install near air-conditioner vents or where there is excessive dust or smoke.
- When drilling holes in the wall, take care to avoid electrical cables and water or gas pipes in the wall.

Approved wall construction

WALL CONSTRUCTION	HARDWARE REQUIRED
Wood stud	Included
Wood beam	Included
Solid concrete	Included
Other	Contact a qualified professional


Parts and hardware

⚠ Important. Read the entire manual and check that all parts are included before you start installation and assembly.



ST4.2 × 24 mm lag bolts

W - A · × 4



6 × 29 mm concrete anchors

W - B · × 4



M5 × 12 mm screws

W - C · × 4




Marking template

- · × 1

STEP 1

Disassemble the speaker wall mount

1

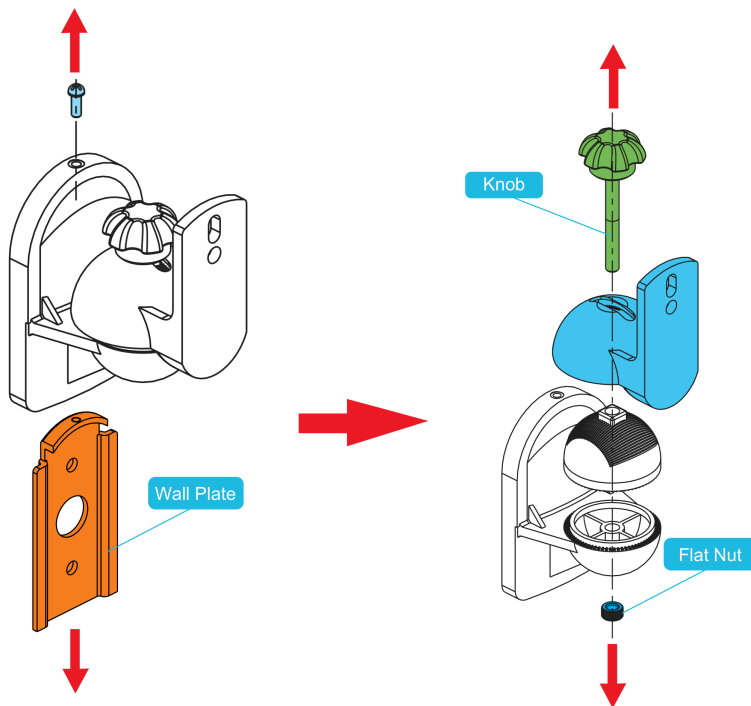


- 01 Loosen and remove the screw to separate the wall plate from the speaker wall mount.
- 02 Loosen and remove the knob and the flat nut to separate the speaker bracket from the speaker mount. Keep the knob and flat nut for step 4.

STEP 2

Install the speaker bracket on the speaker

2

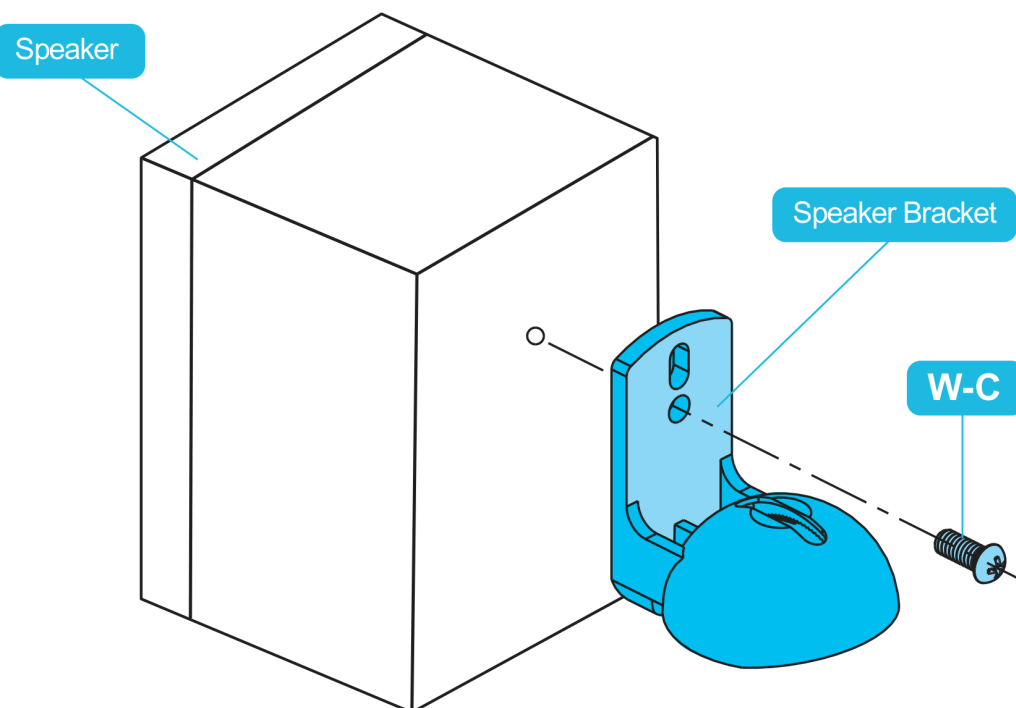


Screw the speaker bracket onto the speaker with the M5 × 12 mm screws (W-C).

Next. Mount the wall plate: follow step 3a for a wood stud wall (page 05) or step 3b for a concrete wall (page 07).

STEP 3 • MOUNT THE WALL PLATE

Mount to a wood stud wall

3a



Stud finder


Level

Pencil


Power drill

3/32 in drill bit


Phillips screwdriver

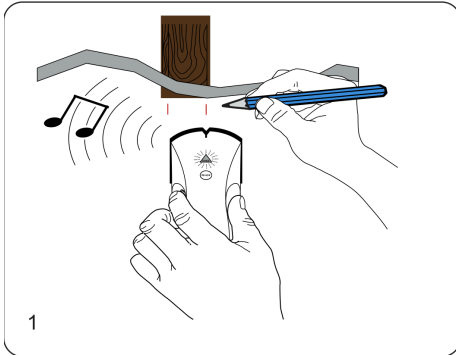


3a.1 Using an edge-to-edge stud finder, find the edges of the stud.

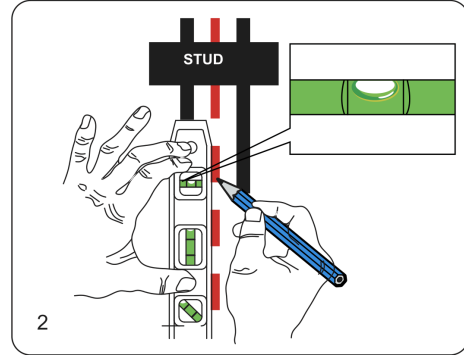


3a.2 Using a level, mark the centerline of the stud.

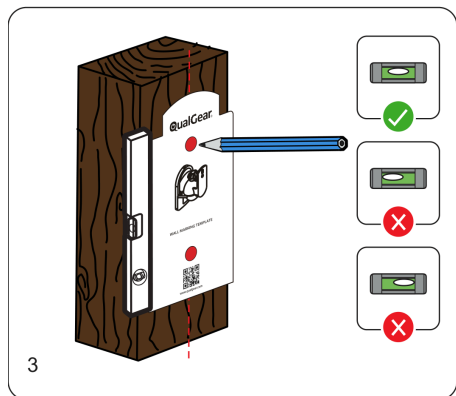

3a.3 Level the marking template and mark two holes for drilling on the centerline of the stud.

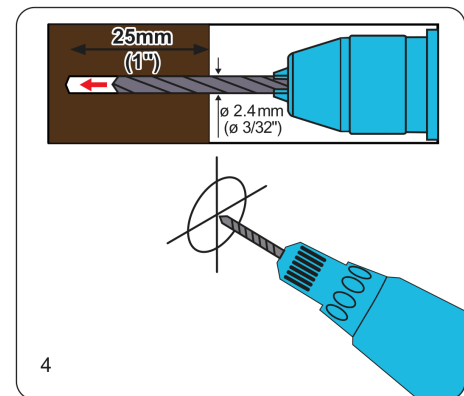

3a.4 Using a power drill and a 3/32 in drill bit, drill pilot holes 3/32 in (2.4 mm) in diameter and at least 1 in (25 mm) deep.

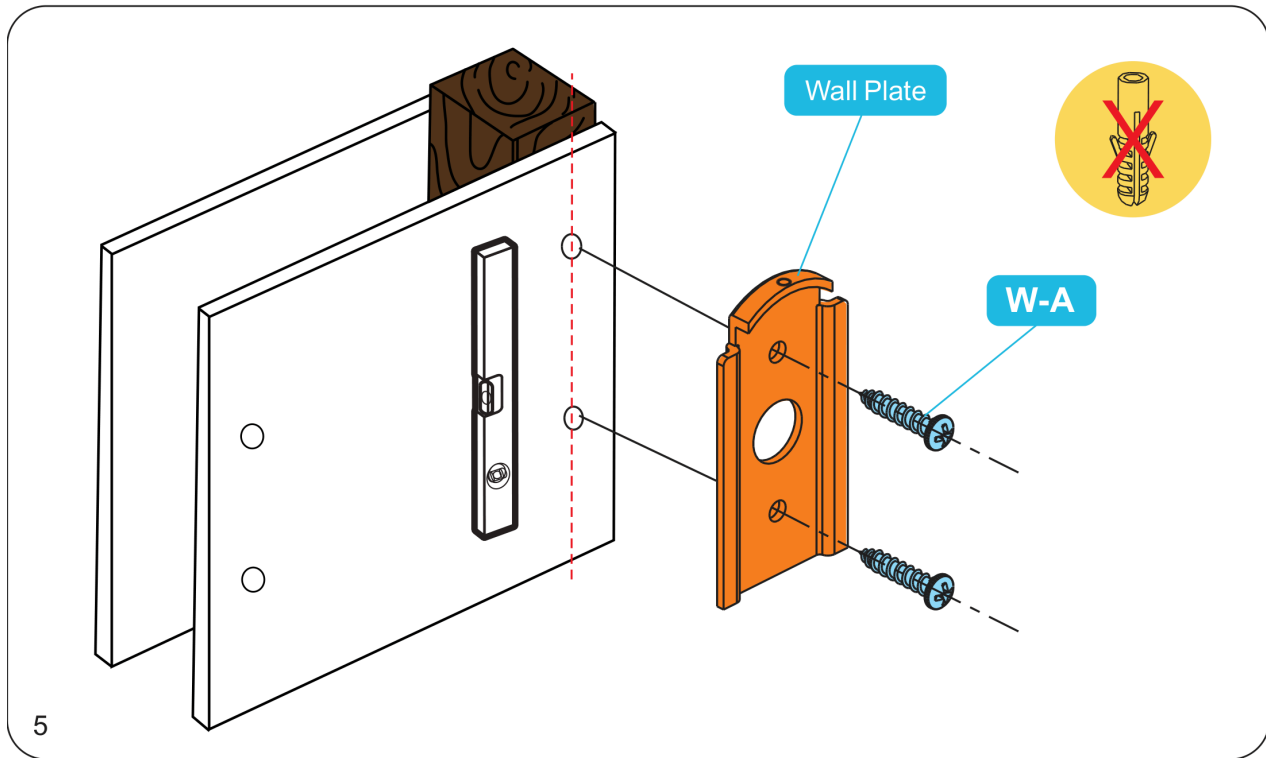3a Mount to a wood stud wall (continued)

3a.5 Using a Phillips screwdriver, mount the wall plate and fasten it with the lag bolts (W-A). Do not use the concrete anchors (W-B) in wood.

Note. Do not use a power drill to drive the lag bolts, and do not overtighten them.

WALL PLATE INSTALLED • NEXT: STEP 4, PAGE 09

STEP 3 • MOUNT THE WALL PLATE

Mount to a concrete wall

3b



Level


Pencil

Power drill


7/32 in masonry drill bit

Hammer


Phillips screwdriver

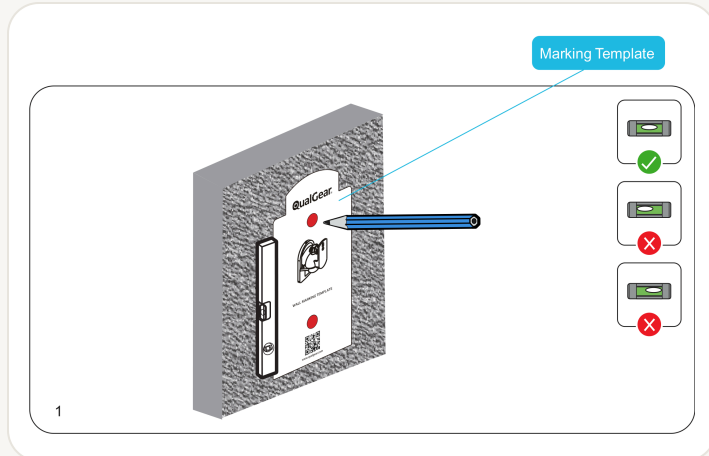


3b.1 Place the marking template against the wall where you want to install the speaker.

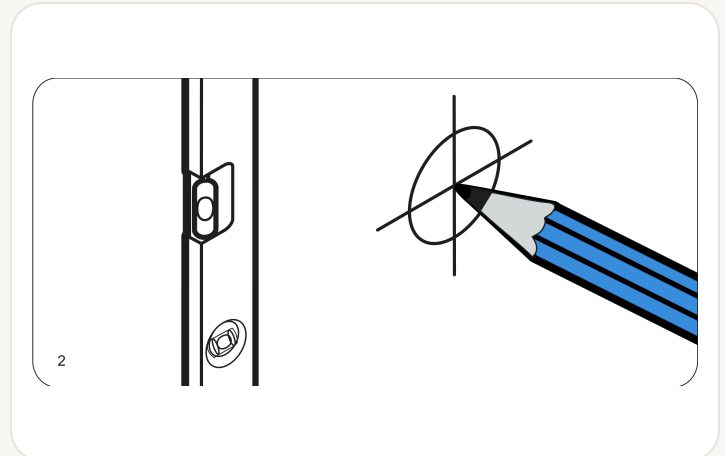

3b.2 Level the marking template and mark two holes for drilling.

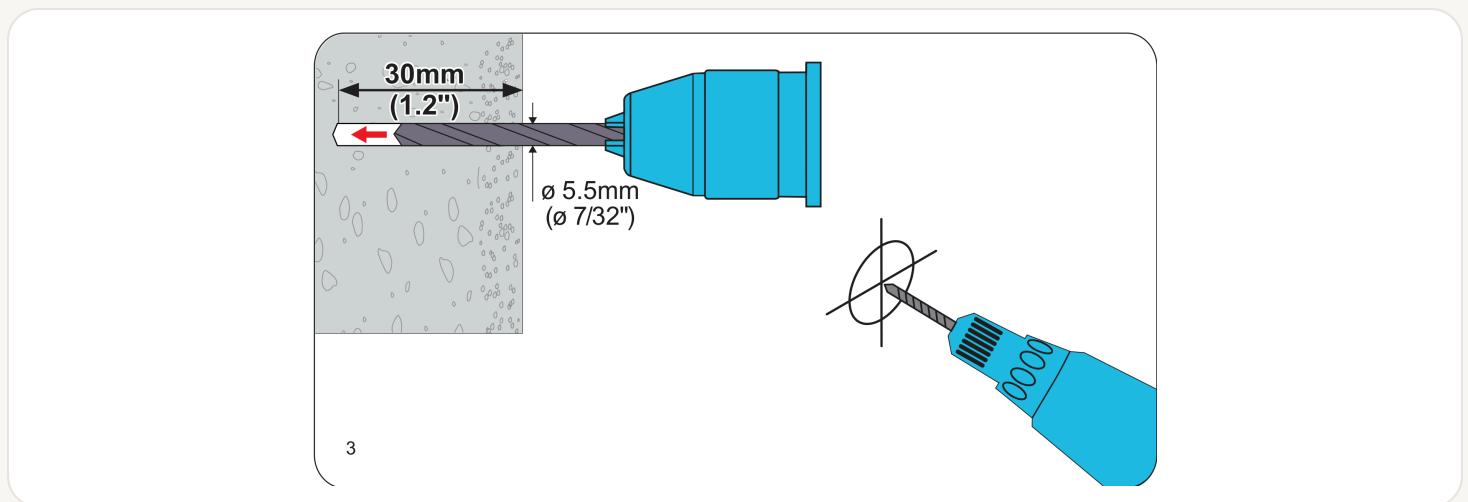

3b.3 Using a power drill and a 7/32 in masonry drill bit, drill pilot holes 7/32 in (5.5 mm) in diameter and at least 1.2 in (30 mm) deep.

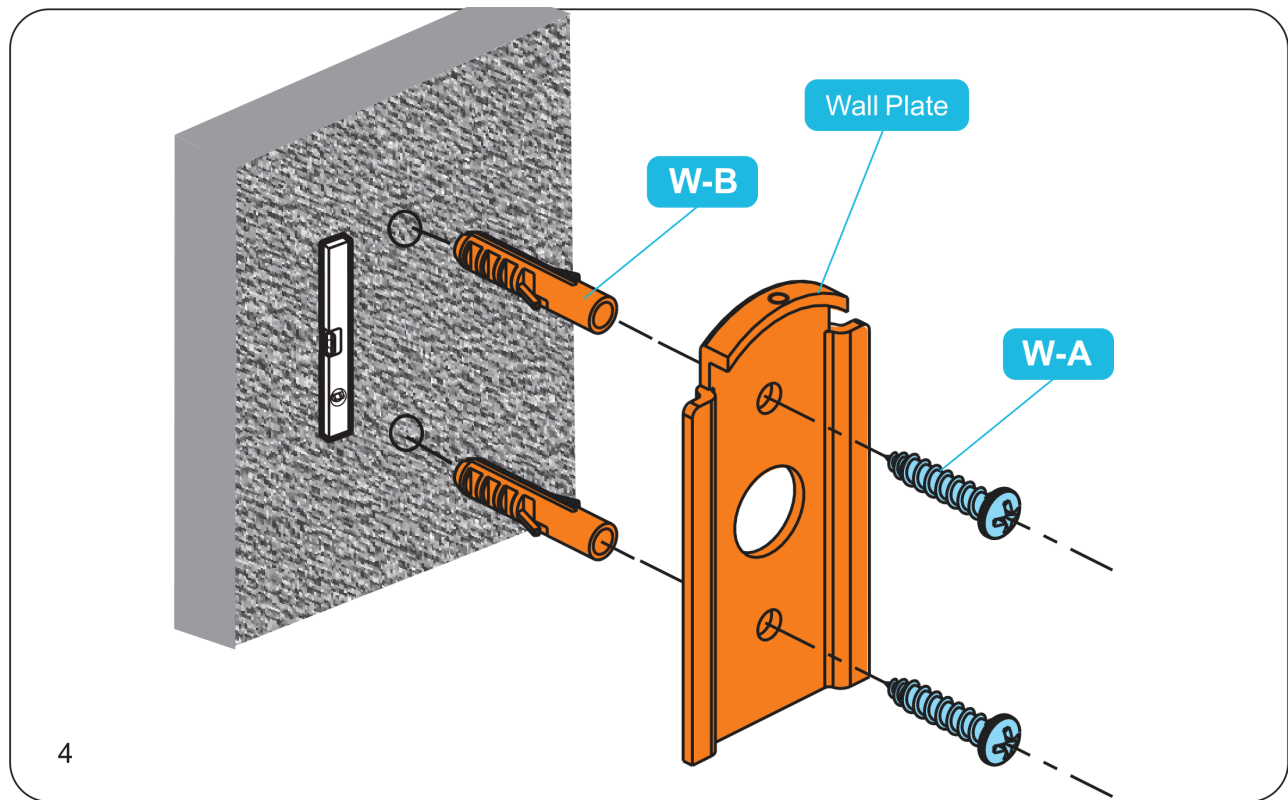3b Mount to a concrete wall (continued)


3b.4 Place a concrete anchor (W-B) in each hole and tap it flush with the wall using a hammer. Mount the wall plate and fasten the lag bolts (W-A) using a Phillips screwdriver.

Note. Do not use a power drill to drive the lag bolts, and do not overtighten them.

STEP 4

Install the speaker on the mount

4

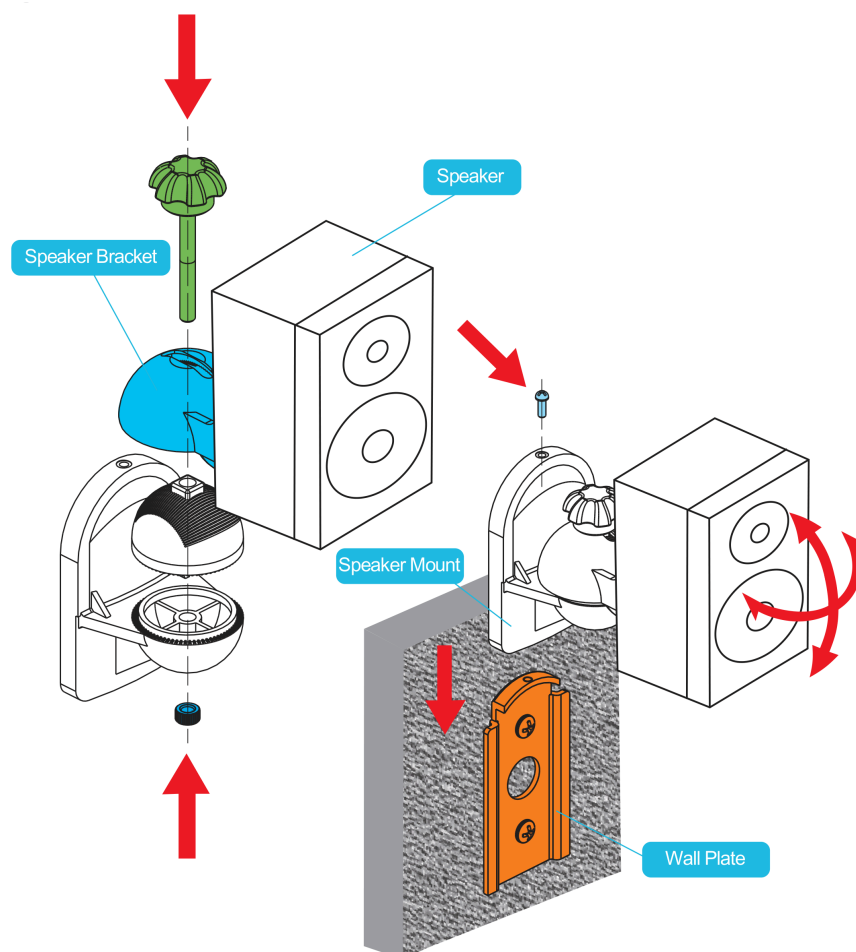

- 01 Assemble the speaker bracket and speaker with the speaker mount, using the knob and flat nut removed in step 1.
- 02 Slide the assembled speaker mount and speaker onto the wall plate. Secure it by tightening the screw.

Adjust. The speaker swivels $\pm 70^\circ$ left or right and tilts $\pm 20^\circ$ up or down.

We're here to help. Real people in Anna, Texas.

QUALGEAR CUSTOMER SUPPORT

CALL

+1 (972) 423-5015

Monday to Friday, 9 a.m. to 5 p.m. Central Time

EMAIL

support@qualgear.com

Put your model number in the subject line

ONLINE

qualgear.com

Orders, returns, RMAs, warranty, and product questions



Scan for the Support hub
qualgear.com/pages/support

Before you contact us, have ready

- 01 Your model number: **QG-SB-002-BLK**
- 02 Your order number or dated proof of purchase
- 03 A short description of the issue, and the step number if it happened during installation
- 04 Photos of the part or installation, if we ask for them

Warranty claims

This product has a **1-year limited warranty (parts only)** from the original purchase date. Email us with this subject line:

Warranty Claim – QG-SB-002-BLK –
[order number]

Do not mail or return anything until we issue an approved RMA or written instructions.

Maintenance

Check at regular intervals that the mount is secure and safe to use. If you have questions about any instruction or warning, contact QualGear support using the details above.

USEFUL PAGES

Warranty

qualgear.com/pages/warranty

Returns and RMAs

qualgear.com/pages/qualgear-return-policy

FAQ

qualgear.com/pages/faq

Shipping

qualgear.com/pages/shipping

QUALGEAR

QG-SB-002-BLK • VERSION OCTOBER 2026