

Electric sit-stand desktop workstation with keyboard tray, assembled in nine steps.

SE09E2WB



Motorized height adjustment · 6 to 19 in (156 to 485 mm) lift

BLACK

MAXIMUM LOAD

44 lb / 20 kg

HEIGHT RANGE

6 to 19 in (156 to 485 mm)

MAXIMUM RATED LOAD

44 lb / 20 kg

⚠ Caution. Do not exceed the maximum rated load. Overloading can cause serious injury or property damage.

Before you begin

This electric sit-stand workstation has a heavy-duty steel construction and a motorized height adjustment system. Read and fully understand this manual before installation, to use the system safely and correctly and to protect the construction and its built-in electronics.

Safety and warnings

- Failure to follow the safety and installation instructions in this manual may cause serious bodily injury.
- Not following the instructions, warnings, and notes may result in serious damage to the system or its components.
- Children aged 8 and older may use this product only with supervision or after instruction in its safe use and the hazards involved. Children must not play with the product, or clean or maintain it without supervision. Unplug the workstation when it is not in use, and keep the power plug out of the reach of children.
- People with reduced physical or mental abilities, or a lack of experience and knowledge, must not use the product unless they are supervised, understand the hazards involved, or have been instructed in its use by a person responsible for their safety.
- To prevent serious bodily injury, never sit on or lean against the desktop.

Electrical safety

The product is powered by electricity. To avoid burns, fire, and electric shock:

- 01 Do not clean the product while the power is connected.
- 02 Do not disassemble or replace components while the power is connected.
- 03 Never operate the system with a damaged cord or plug. Contact your point of purchase to replace damaged parts.
- 04 Never operate the system in a moist environment or if its electrical components have contact with liquids.
- 05 Do not alter the power unit.
- 06 Outdoor use is prohibited.

Other safety instructions



- 01 Clear all obstacles within the height adjustment range.
- 02 Keep the cords and plug organized to prevent tripping hazards.
- 03 Do not modify the construction.
- 04 Do not insert anything into the openings of the product.

Parts checklist

⚠ Important. Check every component in the checklist below. If any component is missing or damaged, contact your point of purchase or support@qualgear.com for a replacement.

Components

ILLUSTRATIONS NOT TO SCALE

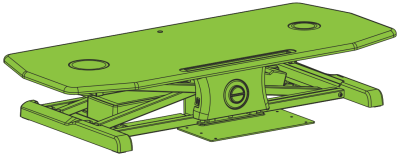
 <p>Workstation A · ×1</p>	 <p>Keyboard tray B · ×1</p>	 <p>Cable clip C · ×2</p>
 <p>Screws D · ×6</p>	 <p>Cable tie E · ×2</p>	 <p>Pad F · ×3</p>
 <p>Screwdriver G · ×1</p>	 <p>Power adapter H · ×1</p>	 <p>Cable I · ×1</p>

Disposal. Do not dispose of this product with other household waste in the EU. Recycle it responsibly through your local recycling service, or contact your point of purchase.

STEP 1

Release the workstation

1

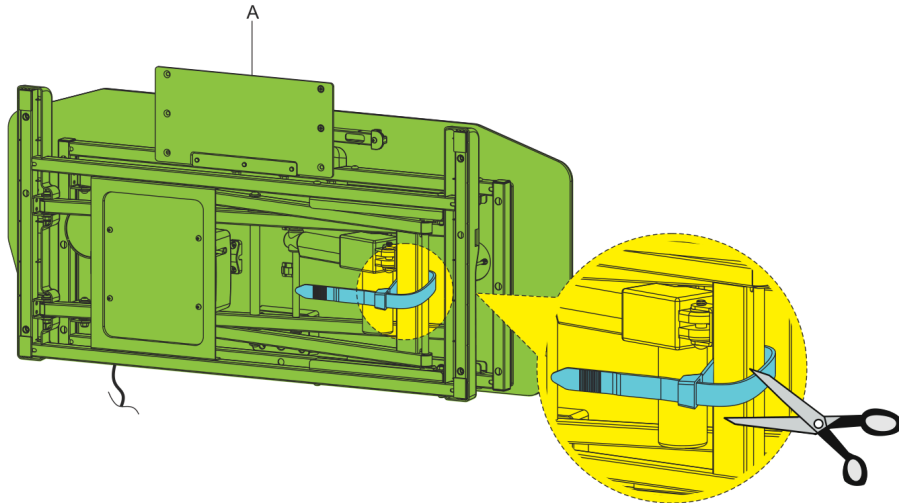


Lay the workstation (A) as shown and cut the strap that secures the frame, using scissors.

STEP 2

Connect the power and raise the workstation

2

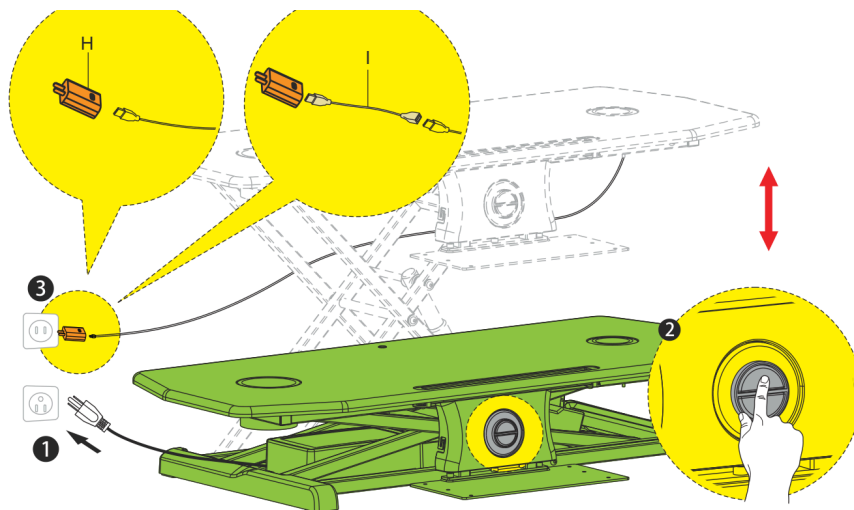


Connect the cable (I) to the power adapter (H) and plug it in (1-3). Press the button on the front of the workstation to raise and lower it.

STEP 3

Install the keyboard tray

3

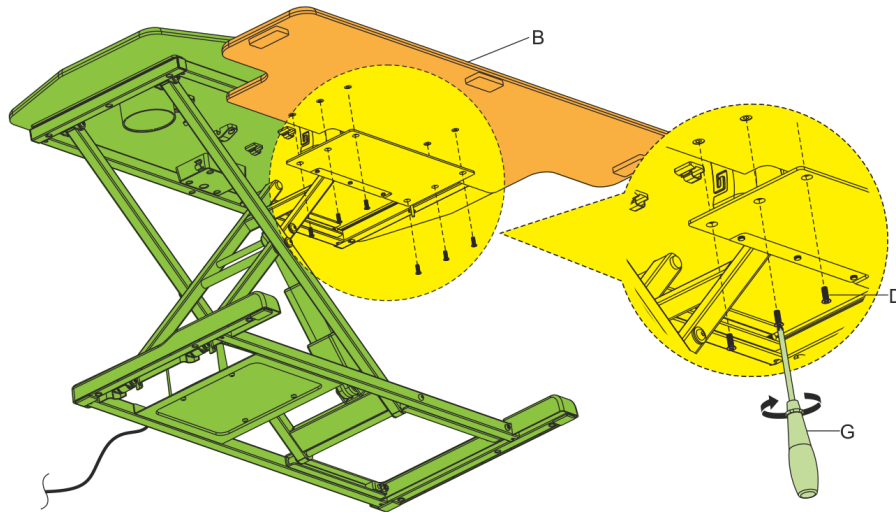


Set the keyboard tray (B) under the frame and fasten it with the screws (D), using the screwdriver (G).

STEP 4

Mount a monitor arm (optional)

4

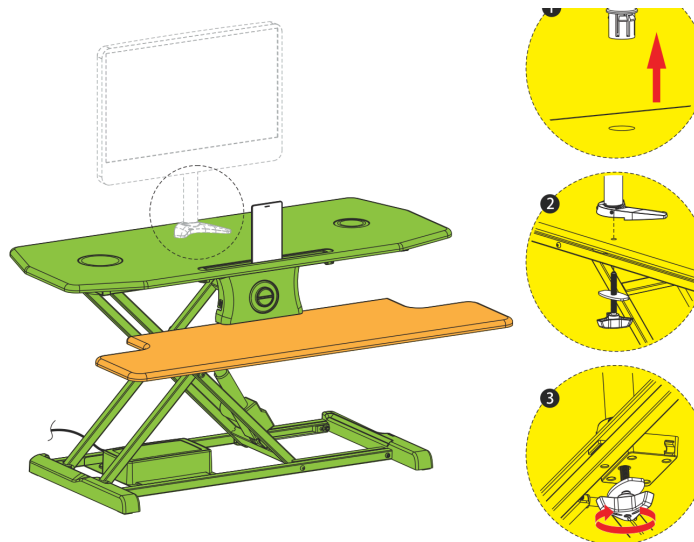


Remove the cap from the desktop hole (1), set the monitor arm mount through the hole (2), and fasten it from below (3).

STEP 5

Connect your devices

5

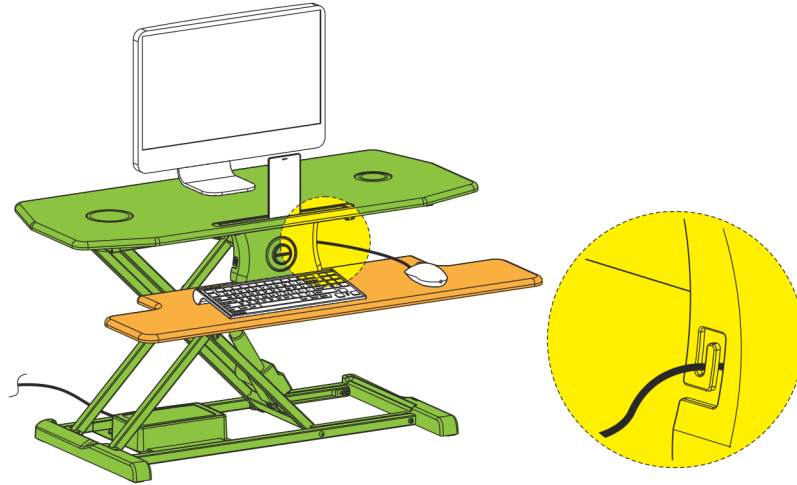


Place your monitor, keyboard, and mouse, and connect the cable at the port shown.

STEP 6

Attach the cable clips

6

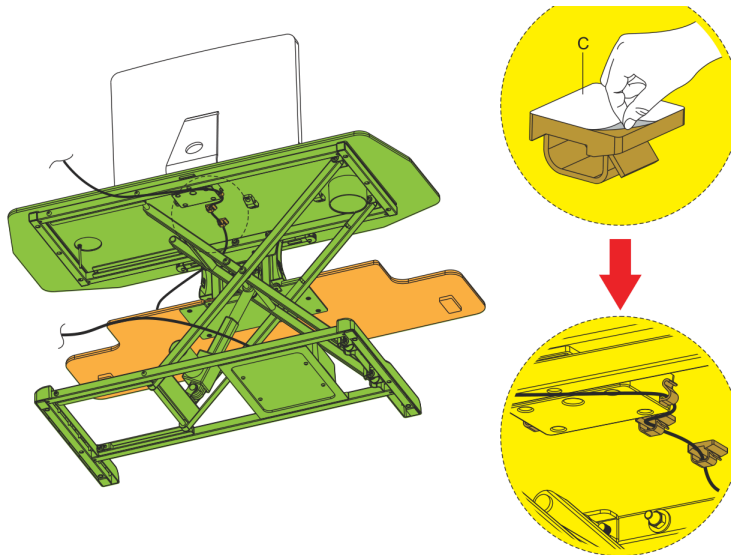


Stick the cable clips (C) under the desktop and route the cables through them.

STEP 7

Bundle the cables

7

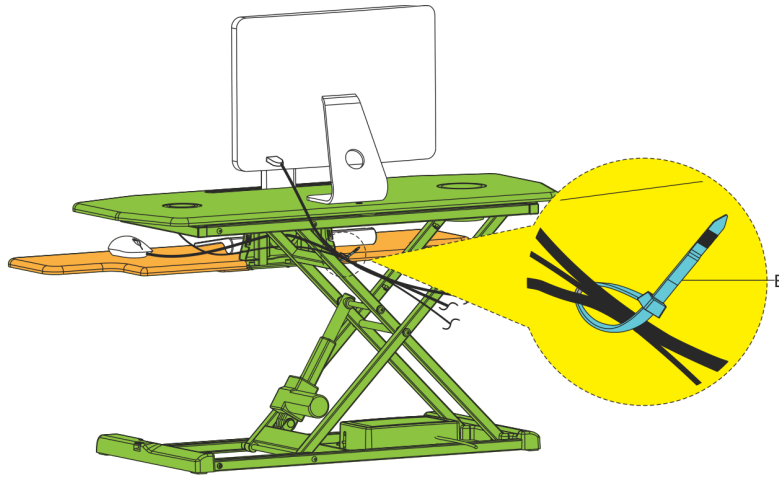

Bundle the cables with the cable ties (E).

STEP 8

Adjust the height

8




The workstation raises the desktop from 6 in (156 mm) to 19 in (485 mm).

STEP 9

Stabilize the keyboard tray

9

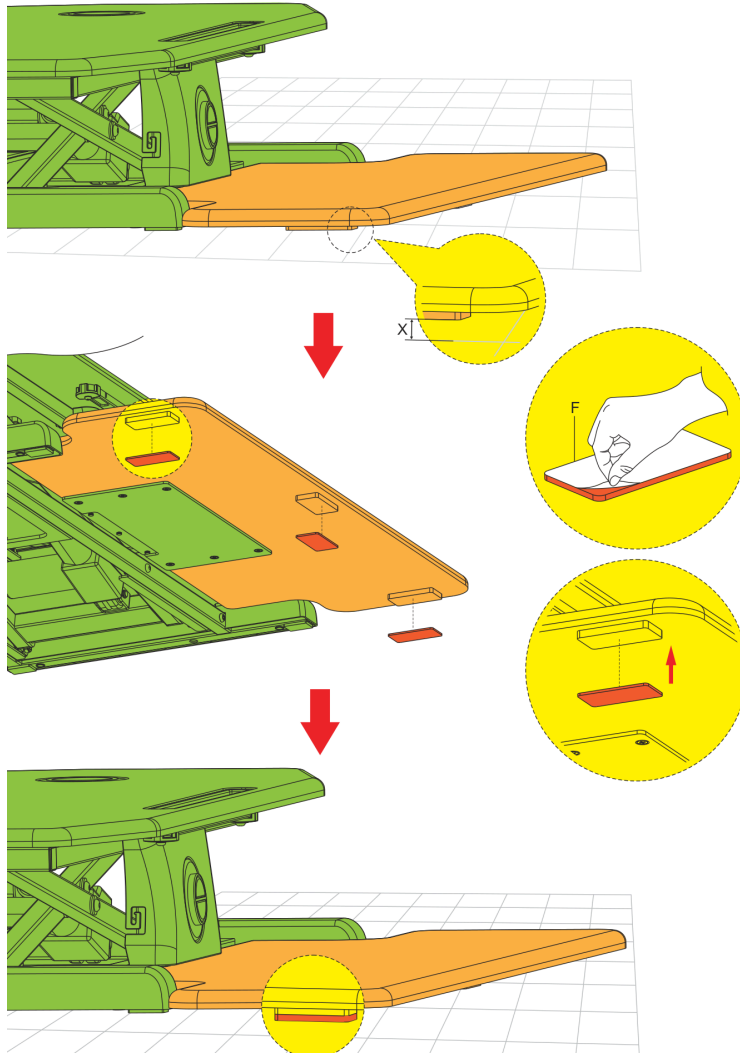

If the keyboard tray does not align with the desktop after the workstation is fully lowered, attach the pads (F) to the back of the keyboard tray to keep the tray stable during use.

We're here to help. Real people in Anna, Texas.

QUALGEAR CUSTOMER SUPPORT

CALL

+1 (972) 423-5015

Monday to Friday, 9 a.m. to 5 p.m. Central Time

EMAIL

support@qualgear.com

Put your model number in the subject line

ONLINE

qualgear.com

Orders, returns, RMAs, warranty, and product questions



Scan for the Support hub
qualgear.com/pages/support

Before you contact us, have ready

- 01 Your model number: **SE09E2WB**
- 02 Your order number or dated proof of purchase
- 03 A short description of the issue, and the step number if it happened during installation
- 04 Photos of the part or installation, if we ask for them

Warranty claims

This product has a **1-year limited warranty (parts only)** from the original purchase date. Email us with this subject line:

Warranty Claim – SE09E2WB – [order number]

Do not mail or return anything until we issue an approved RMA or written instructions.

Maintenance

Check at regular intervals that the workstation is secure and safe to use. If any component is missing or damaged, contact your point of purchase or email support@qualgear.com.

USEFUL PAGES

Warranty

qualgear.com/pages/warranty

Returns and RMAs

qualgear.com/pages/qualgear-return-policy

FAQ

qualgear.com/pages/faq

Shipping

qualgear.com/pages/shipping

QUALGEAR

SE09E2WB • VERSION OCTOBER 2026